

## ChromaSoft™ Interface Software

- **DOS-Based Remote Interface Software**
- **Communicates with Up to 255 Chromalox Controllers**
- **Complete Controller Set-Up Directly from Computer Screen**
- **Data Logging of Process Values, Events, Alarms**
- **Alarm Logging of Controller Alarm Conditions**
- **Save and Load Controller Set-Ups to Computer Files**
- **Modem Interface for Remote Operation**



### Description


The ChromaSoft™ communications software package makes it possible for you to supervise an array of up to 255 controllers from one computer. Using ChromaSoft™, you can program, configure and monitor controller operation remotely or on-site.

The controllers may be connected to the computer via RS-232C, RS-422A and RS-485 or, for remote access, via a modem. Multiple controllers may be connected, or "multi-dropped" on the same communications line by using the RS-422/485 standard for multipoint communications.

### Features

- Easy to install and simple to use, requires minimal computer knowledge.
- Access can be password protected to prevent unauthorized controller operation.

- Provides access to any Chromalox controller in the network. ChromaSoft™ displays the complete setup for the accessed controller, and allows quick, easy changes of control parameters as well as a "snapshot" view of the entire setup.
- The Data Logging Menu allows you to set-up a configuration to monitor and time stamp process values, events and alarms. The data may be logged to a file or displayed on the computer screen.
- Controller alarm conditions can be configured into a log using the ChromaSoft™ Alarm Logging Feature. The Alarm Log can be sent to a file or printer, and monitored on the computer screen.
- The ChromaSoft™ VIEW option provides real-time graphic representation of the selected controller's status. These pre-configured screens allow the flexibility to assign labels, customizing the view screen to the application.

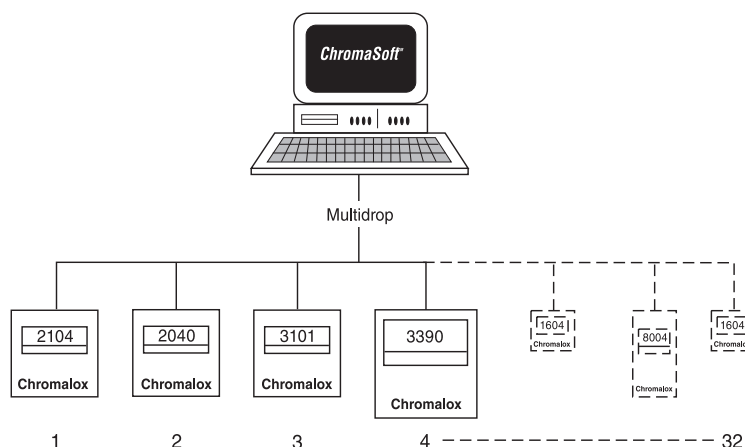


Controller Accessories

# ChromaSoft™

## Interface Software

*(cont'd.)*

### Typical View Screen

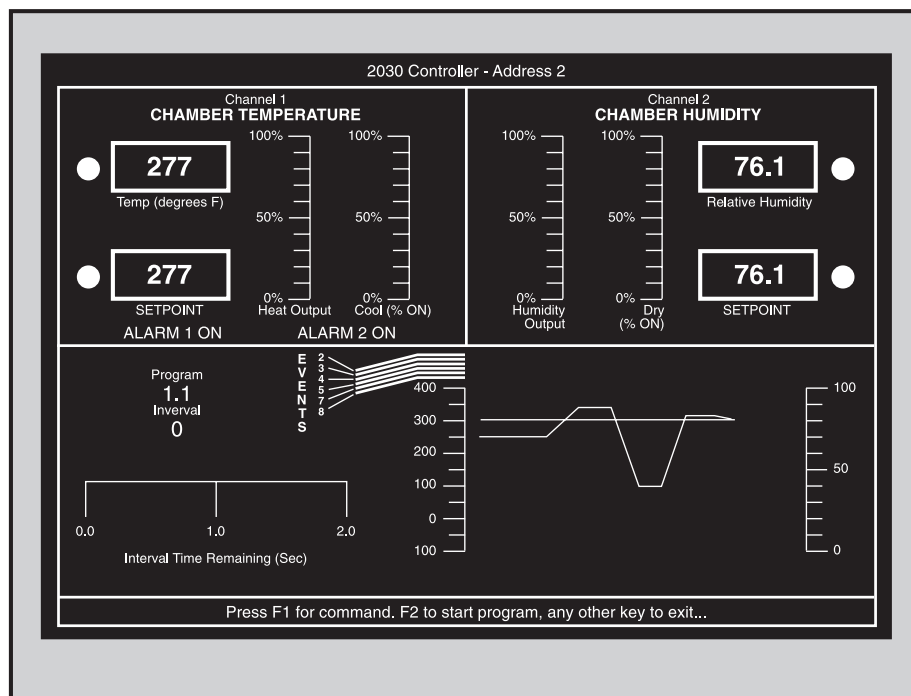

### Specifications

<b>Computer</b>	DOS-based computer with 512K (minimum) memory and one serial communications port, 3.5" disk drive.
<b>Graphics</b>	EGA (Enhanced Graphics Adapter) or VGA (Video Graphics Adapter) necessary to utilize color graphics view screen.
<b>Communications</b>	RS-232, RS-422, RS-485
<b>Mouse (optional)</b>	MouseSystems™ or Microsoft™ mouse (for compatible) with mouse driver software installed per manufacturer's instructions.
<b>Modem (optional)</b>	Hayes® compatible

**Note:** ChromaSoft™ is licensed and warranted by Chromalox, Wiegand Industrial Division, Emerson Electric Company. IBM PS/2, PC AT and PC XT are registered trademarks of IBM Corporation. MouseSystems is a registered trademark of Mouse Systems. Microsoft is a registered trademark of MicroSoft Corp.

### Ordering Information

Ordering Information ..... Model Number ..... SOFT-12000

To Order—Specify the model number and quantity