

COS-B

Hot Oil System

- Heat Transfer Fluids¹ to 650°F
- 9 - 400 kW (31 - 1,365 Mbh)
- 240 and 480V, 3 Phase, 60 Hz²
- Non-Pressurized (Atmospheric) Operation
- 150 Lb Carbon Steel Construction
- Long Life 0.475" Dia. Steel Sheath Elements
- Positive Displacement, High-Temperature Pump with Inline Strainer
- Bypass Relief Valve Protects System (Factory Set 45 psi)
- Electronic Digital Temperature and Process Control
- Suction and Discharge Pressure Gauges Monitor Pump Performance
- NEMA 1 Electrical Enclosure Complete with Circuit Breaker, Contactors, Fusing, Switches, Transformers and Pilot Lights
- External Cold Expansion Tank (Optional) with Atmospheric Vent



Applications

Chromalox COS Hot Oil Heat Transfer Systems are engineered to operate up to 650°F at atmospheric pressure (non-pressurized). They are used with Mobiltherm®, Ucon®, Caloria® and other medium temperature heat transfer fluids¹ which do not require pressurization to operate at temperature.


COS heat transfer systems use a cold expansion tank (optional) that is open to the atmosphere. A cold expansion tank eliminates the need for nitrogen (N₂) purging and reduces the tendency of heat transfer fluids to oxidize and deteriorate.

Construction

Chromalox COS systems are ruggedly constructed and completely self contained (except for the optional external expansion tank). All Chromalox hot oil heat transfer systems have similar components and construction features. All systems come complete with heaters, controls, pumps, valves, safety devices and necessary plumbing. Systems are factory tested and ready to operate.

HEAT TRANSFER

Typical Piping Schematic for Non-Pressurized (Atmospheric) COS Systems

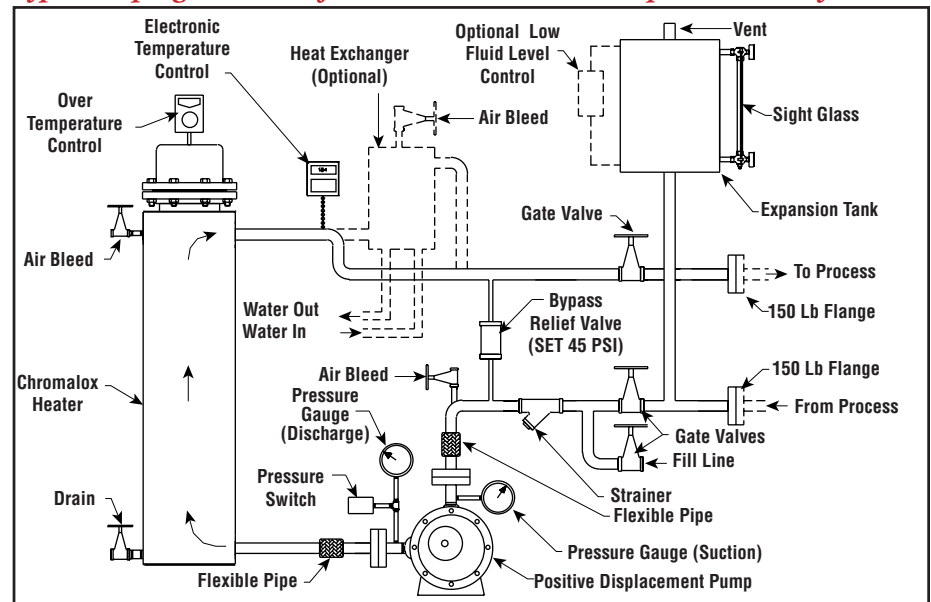

Notes —

1. For a complete list of compatible heat transfer fluids, contact your Local Chromalox Sales office.
2. Other voltages available, contact your Local Chromalox Sales office.

COS-B

Hot Oil System (cont'd.)

Features

Overtemperature Cutout protects elements and fluid from overheating

Low Pressure Lockout Switch de-energizes heaters if a low-flow or no-flow occurs

Electrical Interlock between pump motor and heating element contactors

Flexible Piping before and after pump absorbs vibration and prevents pump damage from thermal expansion

Full Port Manual Gate Valves on all primary hydraulic piping minimize pressure drop

2 Inch Thermal Insulation around heating chambers minimize heat loss

16 Gauge Painted Steel Panels on all exposed sides — powder coat heat resistant paint

Options



- Alternate Voltage and kW Ratings
- Microprocessor Based PID or Ramp Soak Temperature Controls
- Electronic Solid State (SCR) Power Controllers
- Electronic Sequencers, Recorders, Monitors and Time Clocks, Digital Communication Interface available
- Mechanical Pump Seals and Special Pumps
- Type RJC Closed-loop Cooling Modules
- Expansion Tanks Matched to System (recommended)
- Float or Level Switches for Expansion Tank
- ASME Section VIII Certification 100 psi at 650°F

Electrical Enclosure Options

NEMA 1 enclosures and open drip proof motors are standard on all hot oil systems. All systems (except OTCS) available with optional enclosures that comply with:

- NEMA 4/12 Weather Resistant Oil and Dust Tight with TEFC motors
- Explosion Resistant Class I, Group D, Div. 1 with TEFC Explosion Resistant motors.

Dimensions (Inches)

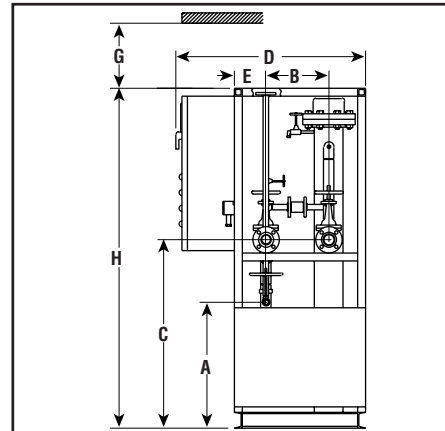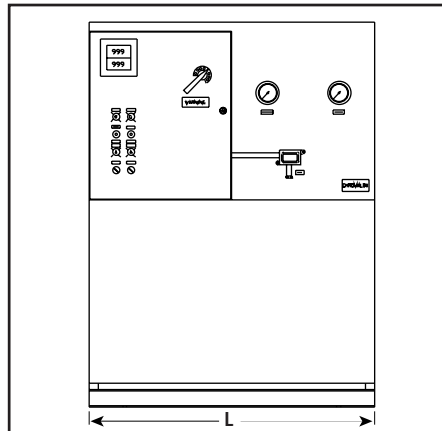

Dimensions (Inches)

| kW | Pump Rate (GPM) | Pump Motor (HP) | Inlet/Outlet Pipe Size 150 Lb. Flg | Dimensions (In.) | | | | | | | |
|---------|-----------------|-----------------|------------------------------------|------------------|----|----|----|--------|----|-------|----|
| | | | | L | D | H | A | B | C | E | G |
| 9-30 | 35 | 2 | 1-1/2 | 48 | 35 | 77 | 24 | 12 | 36 | 6 | 50 |
| 40 | 60 | 3 | 2 | 48 | 35 | 77 | 24 | 12 | 36 | 6 | 50 |
| 60 | 80 | 5 | 2 | 48 | 35 | 81 | 24 | 11-1/4 | 36 | 5-1/2 | 50 |
| 80 | 80 | 5 | 2 | 48 | 35 | 96 | 35 | 11-1/4 | 45 | 5-1/2 | 66 |
| 100 | 120 | 7-1/2 | 3 | 54 | 42 | 96 | 36 | 13-1/2 | 48 | 6-1/2 | 66 |
| 125-150 | 150 | 7-1/2 | 3 | 54 | 42 | 96 | 45 | 12 | 54 | 8 | 66 |
| 200 | 150 | 7-1/2 | 3 | 54 | 42 | 96 | 45 | 12 | 57 | 8 | 66 |
| 250-400 | 200 | 10 | 3 | 62 | 57 | 96 | 42 | 22 | 54 | 12 | 66 |

Specifications and Ordering Information

| kW | Volts | Btuh | Min. Rec. Expansion Tank (Gal.) ¹ | System Volume (Gal.) | No. Heating Stages | Model ² | Stock | Wt. (Lbs.) |
|-----|-------|-----------|--|----------------------|--------------------|--------------------|-------|------------|
| 9 | 240 | 30,708 | 12 | 4 | 1 | COS-650B-9 | NS | 1,000 |
| 9 | 480 | 30,708 | 12 | 4 | 1 | COS-650B-9 | NS | 1,000 |
| 12 | 240 | 40,944 | 12 | 7 | 1 | COS-650B-12 | NS | 1,100 |
| 12 | 480 | 40,944 | 12 | 7 | 1 | COS-650B-12 | NS | 1,100 |
| 15 | 240 | 51,180 | 18 | 7 | 1 | COS-650B-15 | NS | 1,100 |
| 15 | 480 | 51,180 | 18 | 7 | 1 | COS-650B-15 | NS | 1,100 |
| 20 | 240 | 68,240 | 18 | 7 | 1 | COS-650B-20 | NS | 1,200 |
| 20 | 480 | 68,240 | 18 | 7 | 1 | COS-650B-20 | NS | 1,200 |
| 30 | 240 | 102,360 | 18 | 7 | 1 | COS-650B-30 | NS | 1,300 |
| 30 | 480 | 102,360 | 18 | 7 | 1 | COS-650B-30 | NS | 1,300 |
| 40 | 240 | 136,480 | 30 | 10 | 2 | COS-650B-40 | NS | 1,400 |
| 40 | 480 | 136,480 | 30 | 10 | 2 | COS-650B-40 | NS | 1,400 |
| 60 | 240 | 204,720 | 42 | 16 | 3 | COS-650B-60 | NS | 1,700 |
| 60 | 480 | 204,720 | 42 | 16 | 3 | COS-650B-60 | NS | 1,700 |
| 80 | 240 | 272,960 | 42 | 20 | 3 | COS-650B-80 | NS | 1,800 |
| 80 | 480 | 272,960 | 42 | 20 | 3 | COS-650B-80 | NS | 1,800 |
| 100 | 240 | 341,200 | 80 | 30 | 4 | COS-650B-100 | NS | 1,900 |
| 100 | 480 | 341,200 | 80 | 30 | 4 | COS-650B-100 | NS | 1,900 |
| 125 | 480 | 426,450 | 80 | 42 | 4 | COS-650B-125 | NS | 2,000 |
| 150 | 480 | 511,811 | 80 | 42 | 4 | COS-650B-150 | NS | 2,000 |
| 200 | 480 | 682,400 | 80 | 55 | 4 | COS-650B-200 | NS | 2,100 |
| 250 | 480 | 852,900 | 115 | 76 | 6 | COS-650B-250 | NS | 3,100 |
| 300 | 480 | 1,023,600 | 115 | 76 | 6 | COS-650B-300 | NS | 3,200 |
| 350 | 480 | 1,194,200 | 115 | 100 | 6 | COS-650B-350 | NS | 3,400 |
| 400 | 480 | 1,364,800 | 115 | 100 | 6 | COS-650B-400 | NS | 3,500 |

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN, options and quantity.
 1. Expansion tank size should be double the increase in volume due to thermal expansion of heat transfer fluid.
 2. Does not include expansion tank; see System Options for details.

WARNING — In hazardous areas, pipe surfaces could achieve temperatures high enough to cause auto-ignition of the hazardous materials present. Consult Article 500 of

the National Electrical Code for further information on the maximum allowable temperatures for a specific application.