




# DRA

## Portable Spot Industrial Salamander Blower Heater

- 7.5 to 30 kW
- 25,590 to 102,360 BTUH
- 208, 240, 480 and 600 Volts
- Single and Three Phase
- No Assembly Required
- Built-in Controls



### Dimensions (Inches)

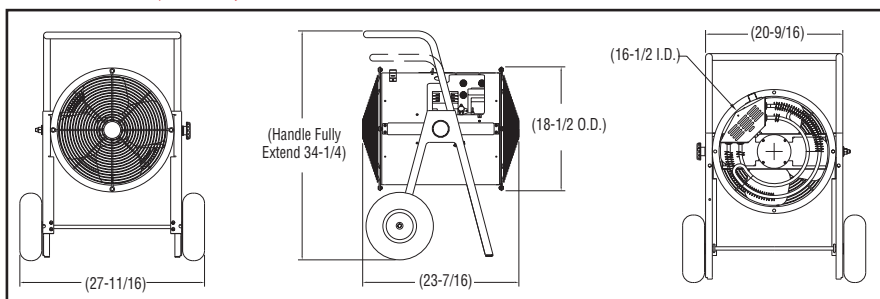

### Description

The Chromalox DRA Dragon is a rugged industrial grade, self contained, highly mobile, electric blower heater. The DRA can be left unattended without the threat of poisoning from combustion by-products associated with fuel fired heaters. The built in safety features include an adjustable thermostat to control the outlet air temperature, auto-reset cutouts for the fan motor and heating elements. The thermostat provides settings for full off, fan only and temperature control in the heating setting. Dragon heaters feature a large, easily accessible control and wiring compartment containing a magnetic contactor; additional safety is provided by a 120 volt control voltage transformer and motor starter on 480 and 600 volt units. The bright red polyester powder coated heating cylinder is highly visible and can be rotated to direct heat or fan driven air movement where it is needed. For assured safety, all standard units meet the requirements of UL (File No. E7061) and CSA (File No. LR40859).

### Construction

#### Heating Cylinder

A structural frame consisting of 2 spun steel rings and 2 formed steel channels support a 20 gauge steel cylinder phosphate coated for corrosion resistance, and finished in red polyester powder coat paint. The heating cylinder pivots vertically to direct air flow.

### Leg Assembly

Each side consists of a one piece, 12 gauge, formed steel member, which accepts a steel tubular handle, held in place with a 1 1/2" long x 1/4" bolt on each side. The handle can be raised from the shipping position if desired. The rubber, pneumatic wheels are 10" diameter and 3 1/2" wide to provide ease of transporting the heater on irregular and gravel surfaces. The large wheels make it easy to roll up stairways without damage to decorative step surfaces.

### Fan Assembly

The self-centering fan assembly consists of a totally enclosed, permanently lubricated motor and a dynamically balanced aluminum fan blade for smooth, quiet operation.

### Controls

A thermostat, with a temperature range of 40°F to 100°F is included, with a full off position, a fan only position and an adjustable range of temperature settings in the heating mode position. Each unit includes a 3 pole magnetic contactor and auto-reset thermal cutout. 480 volt and 600 volt units also include a motor relay and 120 volt control voltage transformer for personnel safety.

### Safety Guards

Front and rear grills are 10 gauge, finished in black polyester powder coat and are designed to meet OSHA safety requirements.

### Heating Assembly

The patented metal sheath Fintube® heating elements consist of steel fins furnace brazed on industrial grade .475 diameter steel sheath tubular heaters for maximum heat transfer. The elements are held in place with steel bulkhead fittings for durability. The elements feature a high temperature finish for corrosive protection.

### Applications

- For Best Results Use in Enclosed Area with Ceiling Heights Below 15'
- Any Commercial or Industrial Application Needing Instant Fan Forced Heat
- Building Construction
- Curing Plaster and Concrete
- Warming Workers
- Thawing Frozen Pipes
- Thawing Railroad Cars
- Heating Large Tents
- Non-Hazardous Areas

FORCED AIR

# DRA

## Portable Spot Industrial Salamander Blower Heater *(cont'd.)*

### Specifications And Ordering Information

kW	Volts	Phase	Amps <sup>1</sup>	BTU/H	HP	CFM	Temp. Rise °F <sup>2</sup>	Model	Stock	PCN	Wt. (Lbs.)
7.5	208	1 and 3	36.3/21.0	25,590	0.06	1070	23	DRA-07-83	NS	295523	65
7.5/5.6	240/208	1 and 3	31.5/18.3 <sup>3</sup>	25,590	0.06	1070	23	<b>DRA-07-23</b>	<b>S</b>	<b>295531</b>	65
9.75	208	1 and 3	47.1/27.3	33,267	0.06	1070	31	<b>DRA-10-83</b>	<b>S</b>	<b>295540</b>	65
10/7.5	240/208	1 and 3	40.8/23.7 <sup>3</sup>	33,267	0.06	1070	31	<b>DRA-10-23</b>	<b>S</b>	<b>295558</b>	65
15	208	3	41.8	51,180	0.06	1070	46	DRA-15-83	NS	295566	65
15/11.2	240/208	3	36.3 <sup>3</sup>	51,180	0.06	1070	46	<b>DRA-15-23</b>	<b>S</b>	<b>295574</b>	65
15	480	1 and 3	31.4/18.2	51,180	0.06	1070	46	<b>DRA-15-43</b>	<b>S</b>	<b>295582</b>	65
15	600	1 and 3	25.2/14.6	51,180	0.06	1070	46	DRA-15-93	NS	295596	65
19.5/15	240/208	3	47.1 <sup>3</sup>	66,534	0.06	1070	61	<b>DRA-20-23</b>	<b>S</b>	<b>295603</b>	75
20	480	1 and 3	42.0/24.4	68,240	0.06	1070	62	<b>DRA-20-43</b>	<b>S</b>	<b>295611</b>	75
20	600	1 and 3	33.5/19.4	68,240	0.06	1070	62	DRA-20-93	NS	295620	75
30	480	3	36.3	102,360	0.06	1070	92	<b>DRA-30-43</b>	<b>S</b>	<b>295638</b>	75
30	600	3	29.1	102,360	0.06	1070	92	DRA-30-93	NS	295646	75

**Stock Status:** S = stock AS = assembly stock NS = non-stock  
**To Order**—Specify model, PCN, kW, volts, phase and quantity.  
 1. Includes motor amps See back page for control, thermostat and fan options.  
 2. Temperature rise at 240V operation All units are factory wired for 3 phase operation.  
 3. 208V amperage is 86% of 240V value Models designated 1 and 3 phase can be field wired for single phase operation.

### Cable Kits for Chromalox DRA Series Portable Blower Heaters

Model No.	Used on Heater	Cable Specifications			Cord Connector	Stock	PCN	Wt. (Lbs.)
		Size/Type	Max. Amp	Temp. Ratings	NPT			
PLC-2514-4	15kW 600V 3PH	14/4 SO	15	90°C	3/4"	S	295427	7
PLC-2512-4	7.5kW 240V 3PH 15kW 480V 3PH 20kW 600V 3PH	12/4 SO	20	90°C	1"	S	295435	9
PLC-2510-3	15kW 600V 1PH	10/3 SO	30	90°C	1"	S	295443	9
PLC-2510-4	7.5kW 208V 3PH 9.75kW 240V 3PH 20kW 480V 3PH	10/4 SO	25	90°C	1"	S	295451	11
PLC-2508-3	7.5kW 208V 1PH 7.5kW 240V 1PH 15kW 480V 1PH 20kW 600V 1PH	8/3 SO	40	90°C	1"	S	295460	12
PLC-2508-4	9.75kW 208V 3PH 30kW 600V 3PH	8/4 SO	35	90°C	1"	S	295478	15
PLC-2506-3	9.75kW 208V 1PH 9.75kW 240V 1PH 20kW 480V 1PH	6/3 SO	55	90°C	1"	S	295486	16
PLC-2506-4	15kW 240V 3PH 30kW 480V 3PH	6/4 SO	45	90°C	1"	S	295494	17
PLC-2504-4	19.5kW 240V 3PH	4/4 SO	60	90°C	1 1/4"	S	295515	25

SO = Hard Service Cord, 600V. Length = 25 Feet

Cable packages include 25 feet Type SO cable, with either 3-conductors or 4-conductors, depending on the heater requirements. Each cable assembly includes the proper cord (connector). Plugs are not included. All models are factory wired for 3-phase, but can be field wired for single phase, select plug and cord accordingly.

# DRA

## Portable Spot Industrial Salamander Blower Heater *(cont'd.)*

### Plug Kits

Plug Type	Catalog Number	Description	Volts	Amps	Configuration	NEMA#	ANSI#	Fits Cable Dia.	Stock	PCN	Wt. (Lbs.)
LOCKING	PGL-15-20	3 Pole, 4 Wire	250	20		L15-20	C73.85	.385"-.780	ST	338845	0.5
LOCKING	PGL-15-30	3 Pole, 4 Wire	250	30		L15-30	C73.86	.385"-.780	ST	338853	0.5
LOCKING	PGL-16-30	3 Pole, 4 Wire	480	30		L16-30	C73.88	.595"-1.150	ST	338861	0.5
LOCKING	PGL-17-30	3 Pole, 4 Wire	600	30		L17-30	C73.89	.595"-1.150	ST	338870	0.5
LOCKING	PGL-3763C	2 Pole, 3 Wire	600	50		—	—	.750"-1.125"	ST	338917	0.5
LOCKING	PGL-3764C	3 Pole, 4 Wire	600	50		—	—	.750"-1.125"	ST	338925	0.5
NON LOCKING	PGN-6-50	2 Pole, 3 Wire	250	50		6-50	C73.53	.625"-1.187"	ST	338888	0.5
NON LOCKING	PGN-15-20	3 Pole, 4 Wire	250	20		15-20	C73.59	.390"-.775"	ST	338896	0.5
NON LOCKING	PGN-15-50	3 Pole, 4 Wire	250	50		15-50	C73.61	.750"-1.250"	ST	338909	0.5

FORCED AIR